


# MK - 3510



**FEATURE:**

- High quality shear beam load cell
- Nickel plated steel with anti corrosive
- Wider mounting foot for special application
- Can use for forklift, pallet, low platform scale
- 5 core high quality orange cable

Rated Load (t)	L	L1	L2	L3	L4	H/B	D3	H1	H2
1,1.5,2,2.5	130	14.7	74.2	25.4	53.5	31.8	Φ 13	51	4
3.5	171.5	19	95.3	38.1	72.5	38.1	Φ 20	57.3	6

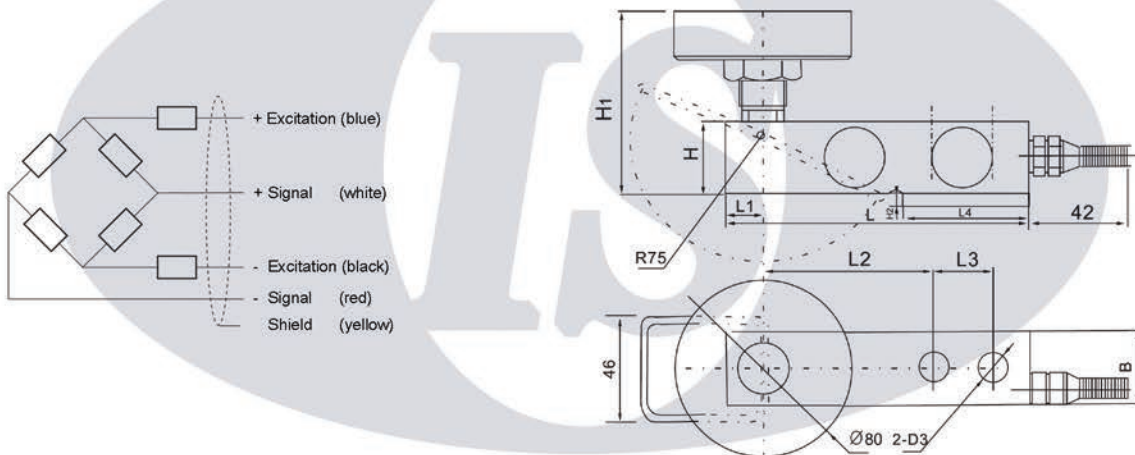

## SPECIFICATION

Rated capacities (Emax)	1,1.2,2,2.5,3,5t	Temperature, compensated	-10°C~+40°C
Rated Output	3.0±0.003mV/V	Temperature, operating	-30~+70°C
Total error	±0.05%F.S	Maximum safe overload	150%F.S
Creep error (30 min)	±0.02%F.S, ±0.03%F.S	Ultimate overload	200%F.S
Zero balance	±1%F.S	Excitation, recommended	10~12V DC
TC ZERO	±0.02%F.S/10°C	Excitation, maximum	15V DC
TC SPAN	±0.02%F.S/10°C	Protection class	IP68
Input resistance	400±20Ω	Construction	Nickel Plated Steel
Output resistance	352±3Ω	Cable	Length:5m
Insulation resistance	≥5000MΩ		Diameter: Φ 6mm