



Aluminium die casting case
IE 1700 series, made of aluminium die casting, are possible to measure product weight accurately even in rough industrial environment.

Highly legible LED display
IE 1700 series consist of large(30mm) and clear LED display. It makes customers to read the display easily even from a long distance.

Rechargeable battery operation
When the battery is fully recharged, IE series can be used for 50 hours with rechargeable battery.

IE-1700 SERIES

Crane Scale

IE 1700 series have high quality and heavy-duty product in rough industrial environment. The product is operated according to OIML R76 and get the European CE certificate.



*Wireless remote controller



IE-1700 SERIES Crane Scale

FEATURES

- 1/2,000-1/3,000 high external resolution
- Acquired the European CE certificate.
- Used washable and heavy-duty Aluminium die casting case
- High intensity hook and shackle, special loadcell for safety installation
- Compact design and easy to portable
- Battery operated (Standard AC adapter and rechargeable)
- Low battery and overload indication function
- Clear and large LED display (30mm)
- Standard Wireless remote controller
- Function key: on/off, Zero, Tare, Hold

SPECIFICATIONS

Model	IE-1700 SERIES					
MAX Capacity (kg)	50	100	200	300	500	1000
Readability (kg)	0.02	0.05	0.1	0.1	0.2	0.5
External Resolution	1/2,000-1/3,000					
Maximum Tare	Full Tare					
Display Digit	5digits					
Display Type	LED (30mm)					
Function Key	Power, Zero, Tare, Hold					
Operating Power	DC 9V/1500mA					
Remote Control Range	Min. 10M					
Dimensions (mm)	225(W)x375(D)x130(H)			225 X 405 X 130		
Product Weight (kg)	4.0			4.2		


INCLUDED ACCESSORY

- AC Adapter (9V/1500mA)
- Rechargeable battery
- Wireless remote controller



*AC Adapter (9V/1500mA)

DIMENSIONS

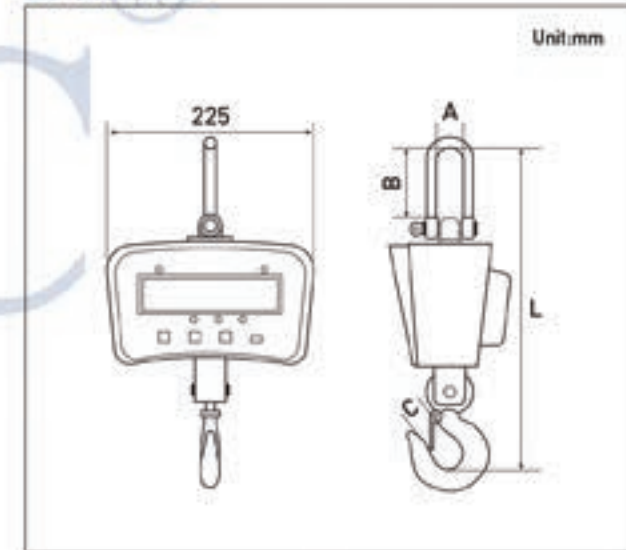

Model	IE-1700 SERIES					
MAX Capacity (kg)	50	100	200	300	500	1000
L(mm)	335			340		
A(mm)	20			25		
B(mm)	65			75		
C(mm)	20			20		



CAS BLDG., # 440-1, SUNGNAE DONG,
GANGDONG GU, SEOUL, KOREA
TEL_ 82 2 2225 3500
FAX_ 82 2 475 4668
<http://www.globalcas.com>

Specifications are subject to change for improvement without prior notice.